


Vapour Hose Couplers



- For use with 3" vapour hose
- Cast aluminum body, bronze arms, stainless steel pins and finger rings
- Buna gasket
- VR4030CSAL has Viton poppet seal

Part #	Description
VRC3000AL	3"
VR4030CSNP	4" x 3"
VR4030CSAL	4" x 3" with Poppet


Air Interlocks

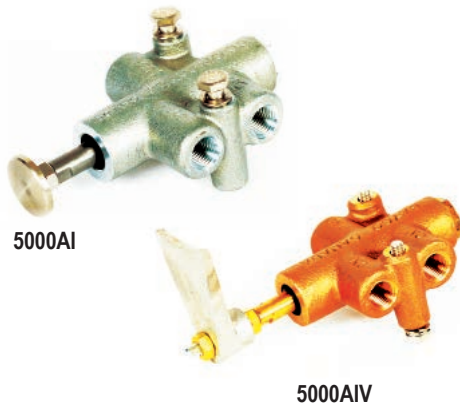

- Mount to API's, vapour valves, and safety bars
- Cast bronze bodies
- Choice of standard piston end or paddle end (for bulb style vapour valve)
- Adjustable to accommodate length variations

Part #	Description
5000AI	Standard piston end
5000AIV	Paddle end for use with VR4000 Vapour Valve only

Inbreathing and Outbreathing Vents

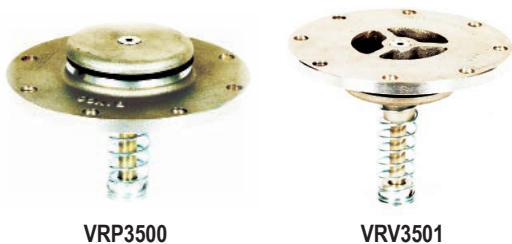

- Installed in vapour plumbing as safety devices to relieve pressure or vacuum build up when vapour systems are blocked during loading/unloading
- 4" TTMA flange mounting (Aluminum)
- Stainless steel shaft and buna seals

Part #	Description
VRP3500	Outbreathing vent (opens at 1 PSI pressure)
VRV3501	Inbreathing vent (opens at 1.5" Hg vacuum)

Pneumatic/Sequential Vapour Vent



- For use with 20" manhole, 4" TTMA bolt pattern mounting
- Safe inward opening valve, easy maintenance of MTBE resistant Viton O-Ring Seals
- Sequencing feature allows control of emergency valve if desired

Part #	Description
VR6035	4"