

Layflat PVC Water Discharge Hose - Blue or Brown




- Applications:**
- A light or heavy duty layflat hose for portable pump and irrigation use
- Tube:**
- Blue or brown PVC impregnation

- Reinforcement:**
- Woven high tensile synthetic yarns
- Cover:**
- Blue or brown PVC impregnation
- Temp Range:**
- +15°F to +130°F



Part #	I.D. (in.)	O.D. (in.)	Working PSI	Bend Radius (in.)	Weight (lbs/ft)	Standard Length (ft)
Blue						
LAYBL100	1	1.11	150	-	0.13	300
LAYBL125	1 1/4	1.37	130	-	0.15	300
LAYBL150	1 1/2	1.63	70	-	0.15	300
LAYBL200	2	2.13	65	-	0.20	300
LAYBL250	2 1/2	2.63	65	-	0.27	300
LAYBL300	3	3.13	60	-	0.33	300
LAYBL400	4	4.14	60	-	0.46	300
LAYBL500	5	5.15	45	-	0.65	300
LAYBL600	6	6.15	35	-	0.78	300
LAYBL800	8	8.16	35	-	1.20	300
LAYBL1000	10	10.20	35	-	1.75	300
LAYBL1200	12	12.30	30	-	2.50	300
Brown						
LAYBR150	1 1/2	1.66	130	-	20	300
LAYBR200	2	2.16	115	-	28	300
LAYBR300	3	3.18	100	-	46	300
LAYBR400	4	4.18	90	-	68	300
LAYBR600	6	6.18	70	-	110	300
LAYBR800	8	8.19	60	-	166	300

Oroflex Layflat

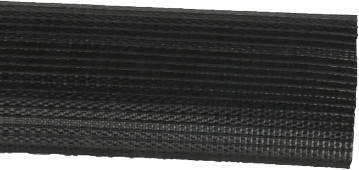

OROFLEX 10

- Applications:**
- A lightweight high pressure, extremely strong hose for general water discharge, and for some chemicals.
- Tube:**
- Black or yellow abrasion and oil resistant nitrile rubber

- Reinforcement:**
- Circular woven polyester yarns layers of synthetic yarns
- Cover:**
- Black or Yellow abrasion, weather and oil resistant nitrile rubber
- Temp Range:**
- -40°F to +200°F



OROFLEX 20

Part #	I.D. (in.)	O.D. (in.)	Working PSI	Weight (lbs/ft)	Standard Length (ft)
OF10BK150	1 1/2	1.78	200	.21	200
OF10BK200	2	2.28	200	.30	200
OF10BK250	2 1/2	2.78	175	.42	200
OF10BK300	3	3.32	175	.46	200
OF10BK400	4	4.32	150	.64	200
OF10BK600	6	6.36	150	1.11	200
OF10BK800	8	8.36	150	1.51	200

Part #	I.D. (in.)	O.D. (in.)	Working PSI	Weight (lbs/ft)	Standard Length (ft)
OF20BK075	3/4	.98	400	.10	200
OF20BK100	1	1.34	400	.14	200
OF20BK150	1 1/2	1.86	300	.30	200
OF20BK200	2	2.36	300	.44	200
OF20BK300	3	3.40	250	.64	200
OF20BK400	4	4.40	250	.86	200